


# FIRST PRODIG CP-1000

/ A revolution  
for measurements  
on low volumes. /

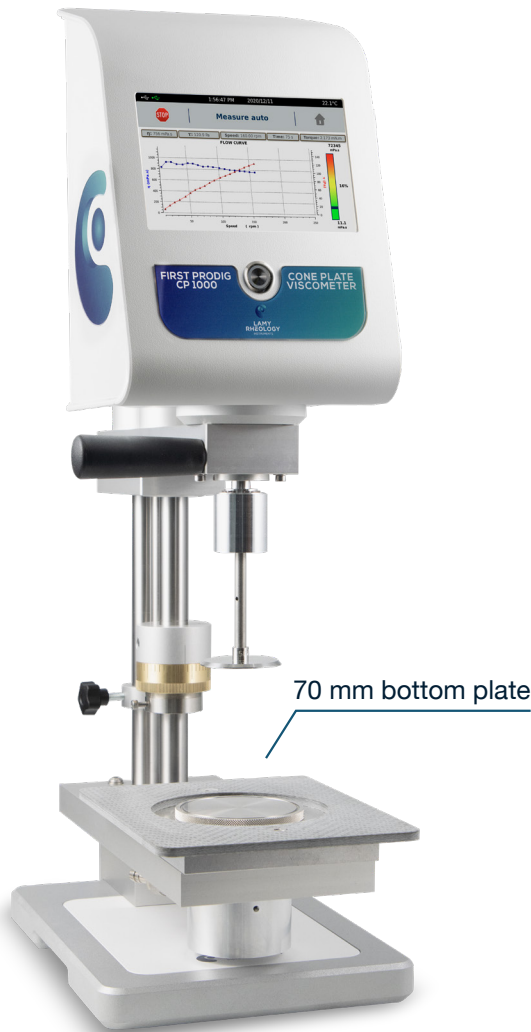

## FEATURES AND BENEFITS

- CP-1000 stand for cone-plate measurement.
- Quick attachment with AC265 coupling.
- Manual lift for gap adjustment.
- Speed or shear rate control.
- Inbuilt software for programming.
- Constant, Multistep or ramp method.
- Direct curve on display.
- Direct analysis with regression.
- Direct report editing.
- Direct measure with time to stop.
- User and locked mode.
- Data recording and USB transfer.
- Torque gage on display.
- Integrated temperature probe.
- Printer connection.
- Compatible with RheoTex software.
- Display of viscosity limits according to mobile and speed.
- LIMS function.
- QC limits function.



## AVAILABLE INSTRUMENT

Reference	Designation	Viscosity range (mPa.s)
N707500	FIRST PRODIG CP-1000 VISCOMETER (+5°C to +65°C)*	3 to 80M **

*M for million / \* Maximum temperature range with circulating bath (not included). / \*\* According to cone-plate MS CP (p84). Not included.*



## WHAT'S INCLUDED WITH DEVICE ? *(according to part number)*

1 Stand with 70mm bottom plate / 1 Double rod with stop ring and adjusting gap / 2 Silicon pipe (1m) / 1 Integrated temperature probe / 1 Touch screen stylus / 1 User manual / 1 Calibration and checking certificate / 1 Microfiber cloth. / 1 Adaptor bayonet-AC265 (Ref. 800146).

# FIRST PRODIG CP-1000



## COMPATIBLES MEASURING SYSTEMS

MS-CP (p84), MS-PP\* (p85), MS-RV (p79),  
MS-VANES (p81), MS-KREBS (p81)  
(\*with accessory 100047)



## OPTIONS & ACCESSORIES

- Barcode reader (p70).
- Touch screen protector (p70).
- Viscosity standards oil (p71).
- Dymo printer (p70).
- RheoTex software (p72-73).
- Protection cover (Ref. 121019).



## SPECIFICATIONS

### Type of instrument

Rotating springless viscometer with 7" Touch screen

### Rotation speeds

Unlimited number of speeds between 0.3 and 250 rpm

### Torque range

From 0.05 to 13 mNm

### Temperature Probe

Equipped with a PT100 sensor which indicates temperatures between -50°C to +300°C

### Accuracy

+/- 1 % of the full scale

### Repeatability

+/- 0,2 %

### Display

Viscosity (cP / Poises or mPa.s / Pa.s)  
Speed – Shear rate – Torque (% - mNm) –  
Shear stress - Time – Temperature

### Norms

ASTM : D4287 ; BS 3900 ; DIN 3219 ;  
52007-1 ; 53019-1 ; 54453 ; ISO 2884; 3219  
; 10364-12

### Languages

French/English/Turkish/German/Italian

### Supply voltag

90-240 VAC 50/60  
Hz

### Analog output

4 – 20 mA

### PC connections

RS232, USB and  
Ethernet

### Printer connection

USB Host Port -  
Compatible PCL/5

### Dimensions and weight

D320 x H550 x W200 mm  
Weight: 14 kg



FIRST PRODIG CP-1000  
+ MK-VANE

Tel : +33 (0)4 78 08 54 06  
Fax : +33 (0)4 78 08 69 44  
contact@lamyrheology.com

11 A, rue des Aulnes  
69410 Champagne au Mont d'Or  
France



www.lamyrheology.com